
Drg No. QDF16R

REMOVE ALL BURRS AND SHARP EDGES.

THIRD ANGLE PROJECTION.

		INCH	MM			
CROWN WHEEL BOLT PCD	D1	5.748	146	Ā		_ _
No. OF BOLTS		12	12			
THREAD / THRO' HOLE		0.448	11.4			
CROWN WHEEL SPIGOT DIA	D2	4.9234	125			
BEARING DIA	D3	1.8126	46			
	D4	1.8908	48			
BEARING DISTANCE	L1	5.061	128.5			
SPIGOT LENGTH	L2	0.745	18.9		B	+
	L2/A	1.235	31.4			
OVERALL LENGTH	L3	7.041	178.8			_[
BEARING/CROWN WHEEL	L4	1.102	28			
BORE	D5	1.2206	31			
DRIVE SHAFT SPLINE:-				V		
No. OF TEETH		37				
PITCH		32/64				
ТҮРЕ		FILLET ROOT SIDE FIT				
LE F.W.D. DIFF DATA SHEET.	7					

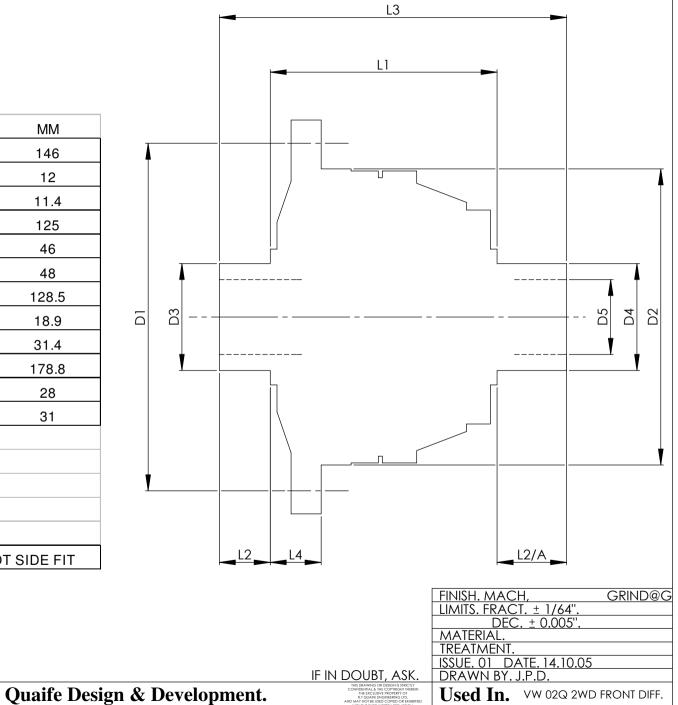

A3(4)border

Drg. No. QDF16R