


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.7475	146
No. OF BOLTS		8	8
THREAD / THRO' HOLE		0.394	10
CROWN WHEEL SPIGOT DIA	D2	4.7513	120.7
BEARING DIA	D3	1.6264	41.3
BEARING DISTANCE	L1	4.968	126.2
SPIGOT LENGTH	L2	0.813	20.6
	L2/A	0.813	20.6
OVERALL LENGTH	L3	6.594	167.4
BEARING/CROWN WHEEL	L4	1.218	30.9
BORE	D4	1.201	30.5
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		24/48 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		30 DEG	

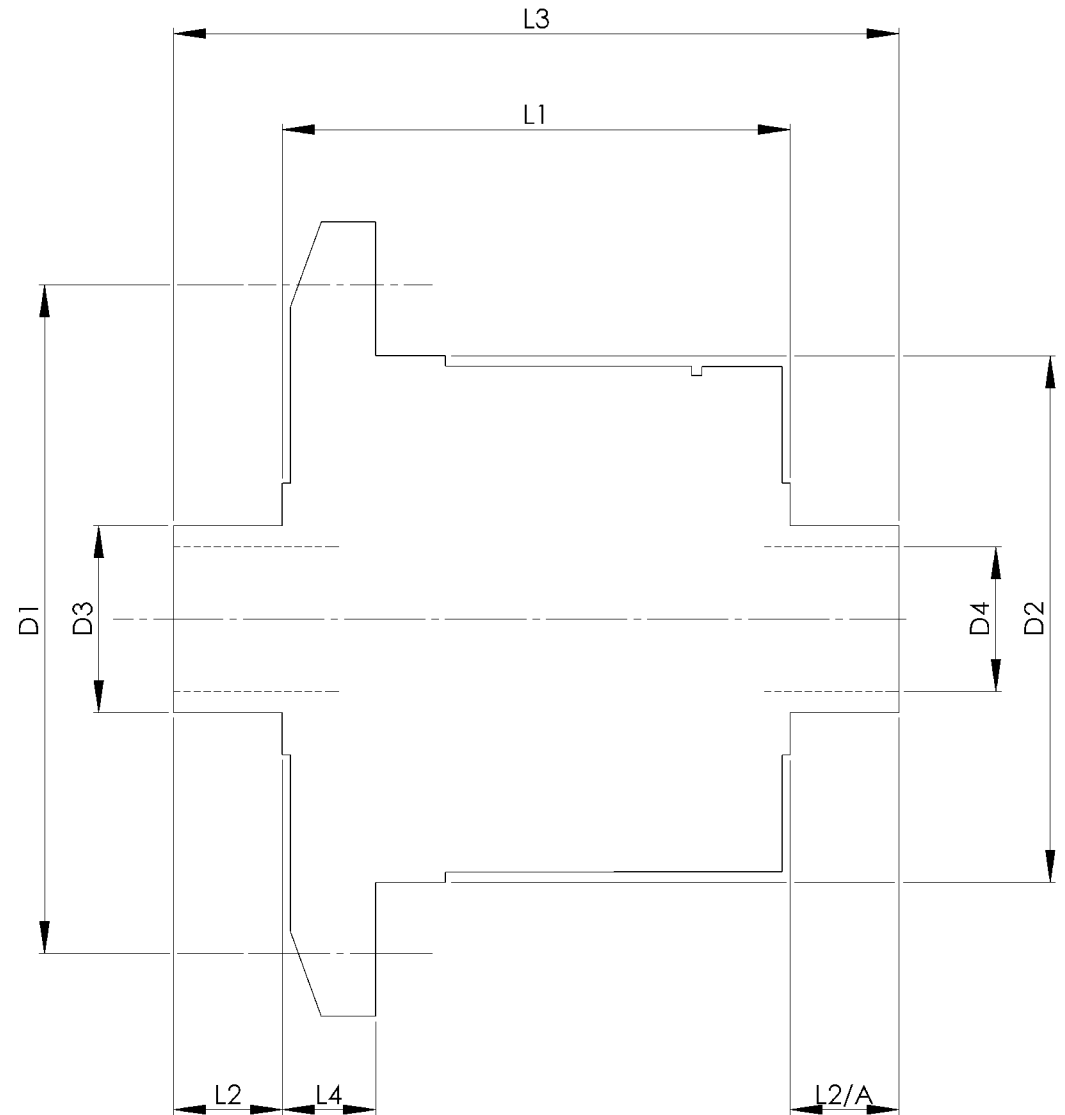

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF37Z

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF RUTLAND TECHNOLOGIES LTD. ANY UNAUTHORIZED REPRODUCTION OR USE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 18.5.05	
DRAWN BY. M.L.M.	
Used In.	FORD EXPLORER (4x4) FRONT