


		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.3125	109.5
No. OF BOLTS		6	6
THREAD / THRO' HOLE		0.394	10.0
CROWN WHEEL SPIGOT DIA	D2	3.7496	95.2
BEARING DIA	D3	1.3783	35.0
BEARING DISTANCE	L1	4.000	101.6
SPIGOT LENGTH	L2	0.740	18.8
	L2/A	0.740	18.8
OVERALL LENGTH	L3	5.480	139.2
BEARING/CROWN WHEEL	L4	0.810	20.6
BORE	D4	1.001	25.4
DRIVE SHAFT SPLINE:-			
No. OF TEETH		10	
PITCH		1 NOM.	
TYPE			
PRESSURE ANGLE			

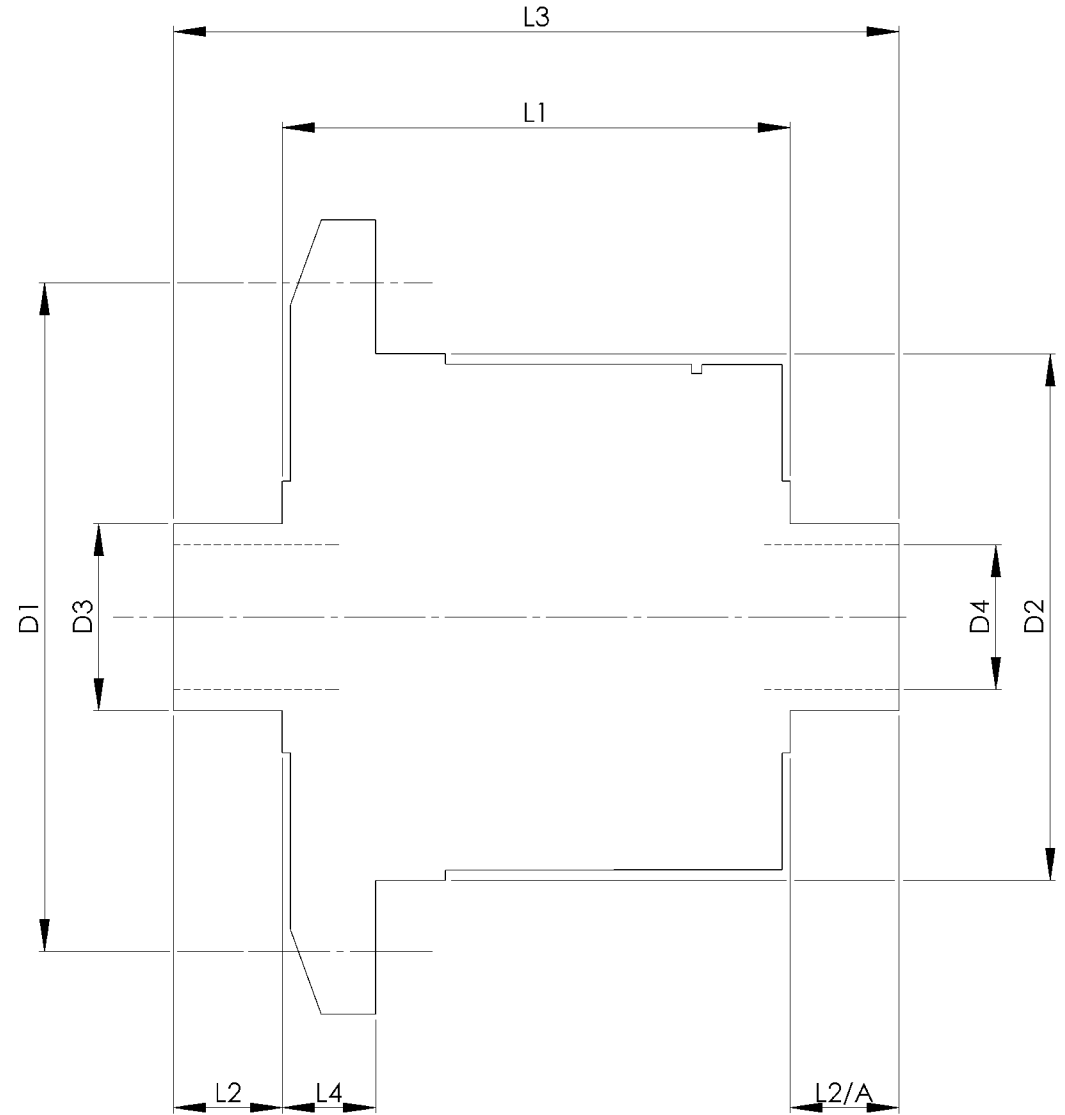

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF5K

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE SOLE PROPERTY OF RUTLAND TECHNOLOGIES AND MAY NOT BE USED, COPIED OR REPRODUCED WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 17.5.05	
DRAWN BY. M.L.M.	
Used In. AUSTIN HEALEY SPRITE	
M.G. MIDGET	