


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.039	128
No. OF BOLTS		10	10
THREAD / THRO' HOLE			11.6
CROWN WHEEL SPIGOT DIA	D2	4.250	108.0
BEARING DIA	D3	1.5756	40.0
BEARING DISTANCE	L1	4.250	108.0
SPIGOT LENGTH	L2	0.790	20.0
	L2/A	0.795	20.2
OVERALL LENGTH	L3	5.835	148.2
BEARING/CROWN WHEEL	L4	0.620	15.7
BORE	D4	1.1824	30.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		28	
PITCH		1 MOD	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

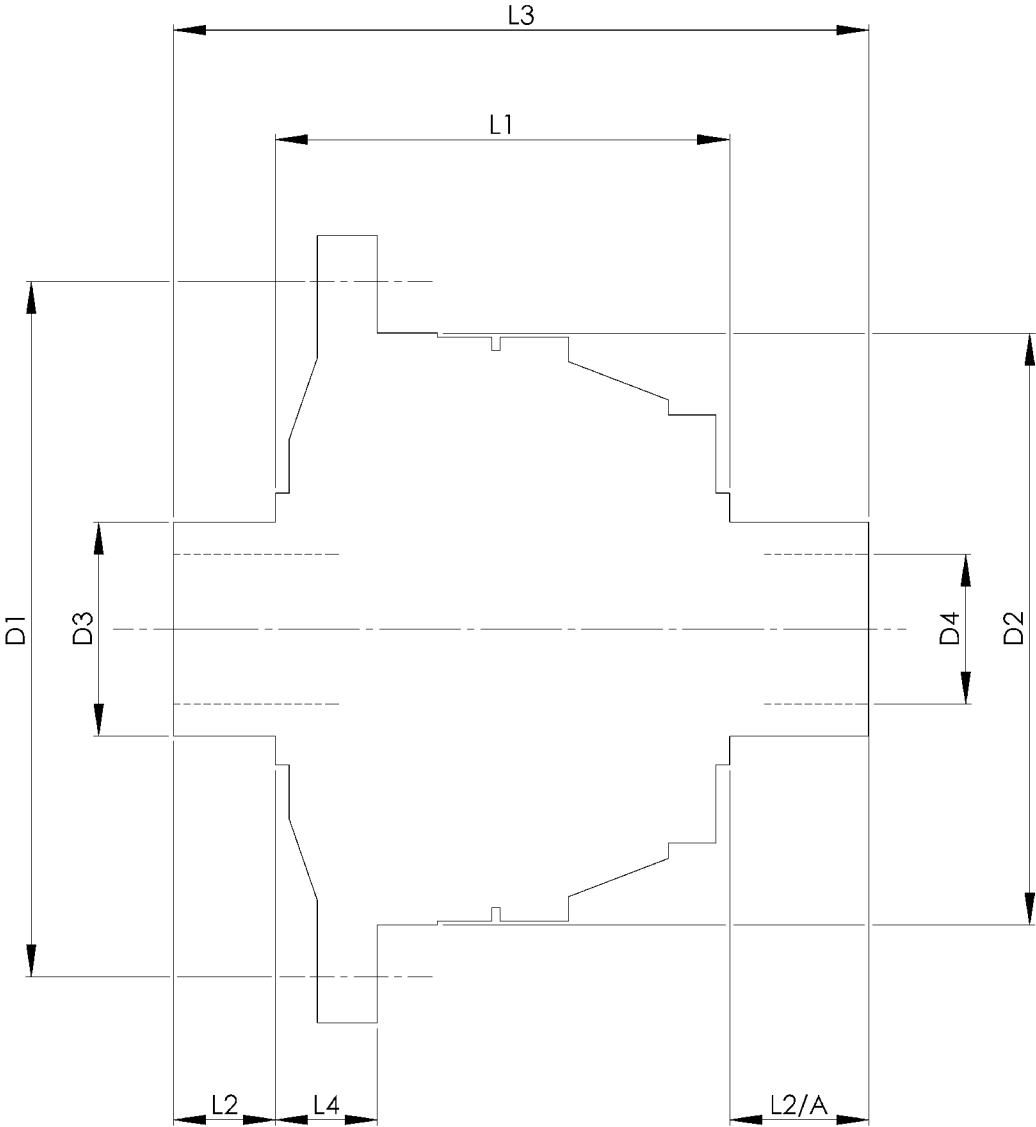

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF6F

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OF DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
QUAIFE DESIGN & DEVELOPMENT LTD.
AND MAY NOT BE USED, COPIED OR REPRODUCED
WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01	DATE. 18.5.05
DRAWN BY. M.L.M.	
Used In.	MAZDA 626 (FWD) FORD PROBE GT V6