


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.625	168.3
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.398	10.1
CROWN WHEEL SPIGOT DIA	D2	5.5617	141.3
BEARING DIA	D3	1.7827	45.3
BEARING DISTANCE	L1	5.040	128
SPIGOT LENGTH	L2	0.830	21.1
	L2/A	0.830	21.1
OVERALL LENGTH	L3	6.700	170.2
BEARING/CROWN WHEEL	L4	0.990	25.1
BORE	D4	1.320	33.5
DRIVE SHAFT SPLINE:-			
No. OF TEETH		30	
PITCH		24/48 DP	
TYPE			
PRESSURE ANGLE		30 DEG	

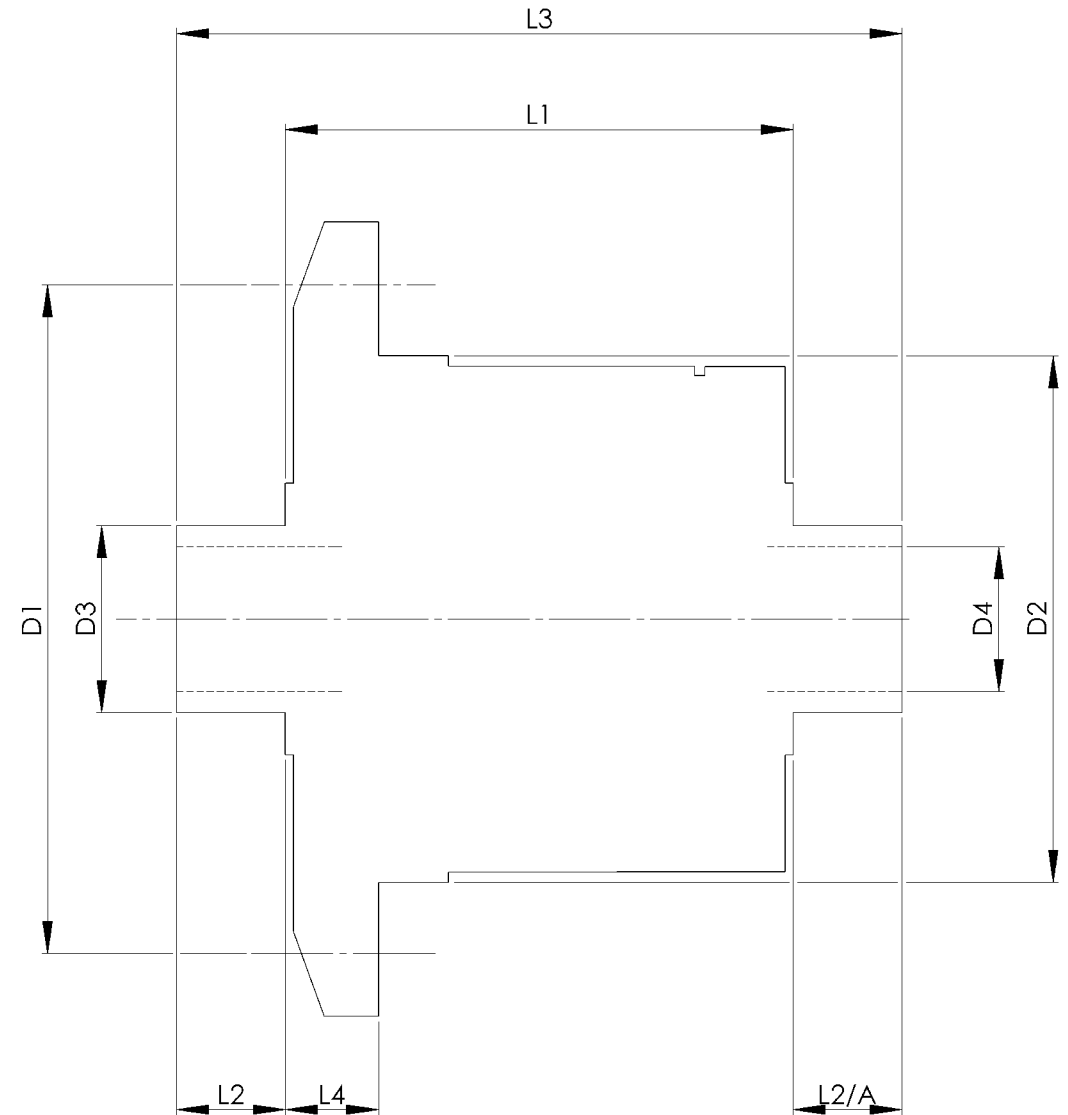

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
<b>Drg. No. QDF9S</b>

**Quaife Design & Development.**

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF RUTLAND TECHNOLOGIES. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 17.5.05	
DRAWN BY. M.L.M.	
<b>Used In.</b> DODGE VIPER V10	
(DANA 44 AXLE)	