


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.024	153
No. OF BOLTS		14	14
THREAD / THRO' HOLE		M12x1.25	M12x1.25
CROWN WHEEL SPIGOT DIA	D2	3.7798	96.0
BEARING DIA	D3	2.5597	65.0
BEARING DISTANCE	L1	4.056	103.0
SPIGOT LENGTH	L2	0.786	20.0
	L2/A	0.785	19.9
OVERALL LENGTH	L3	5.627	143.0
BEARING/CROWN WHEEL	L4	0.684	17.4
BORE	D4	1.045	26.5
	D4/A	1.060	27.0
DRIVE SHAFT SPLINE:-		EXTERNAL	EXTERNAL
No. OF TEETH		38	36
PITCH		20/40 DP	24/48 DP
TYPE		FLAT ROOT	FLAT ROOT
PRESSURE ANGLE		30 DEG	30 DEG

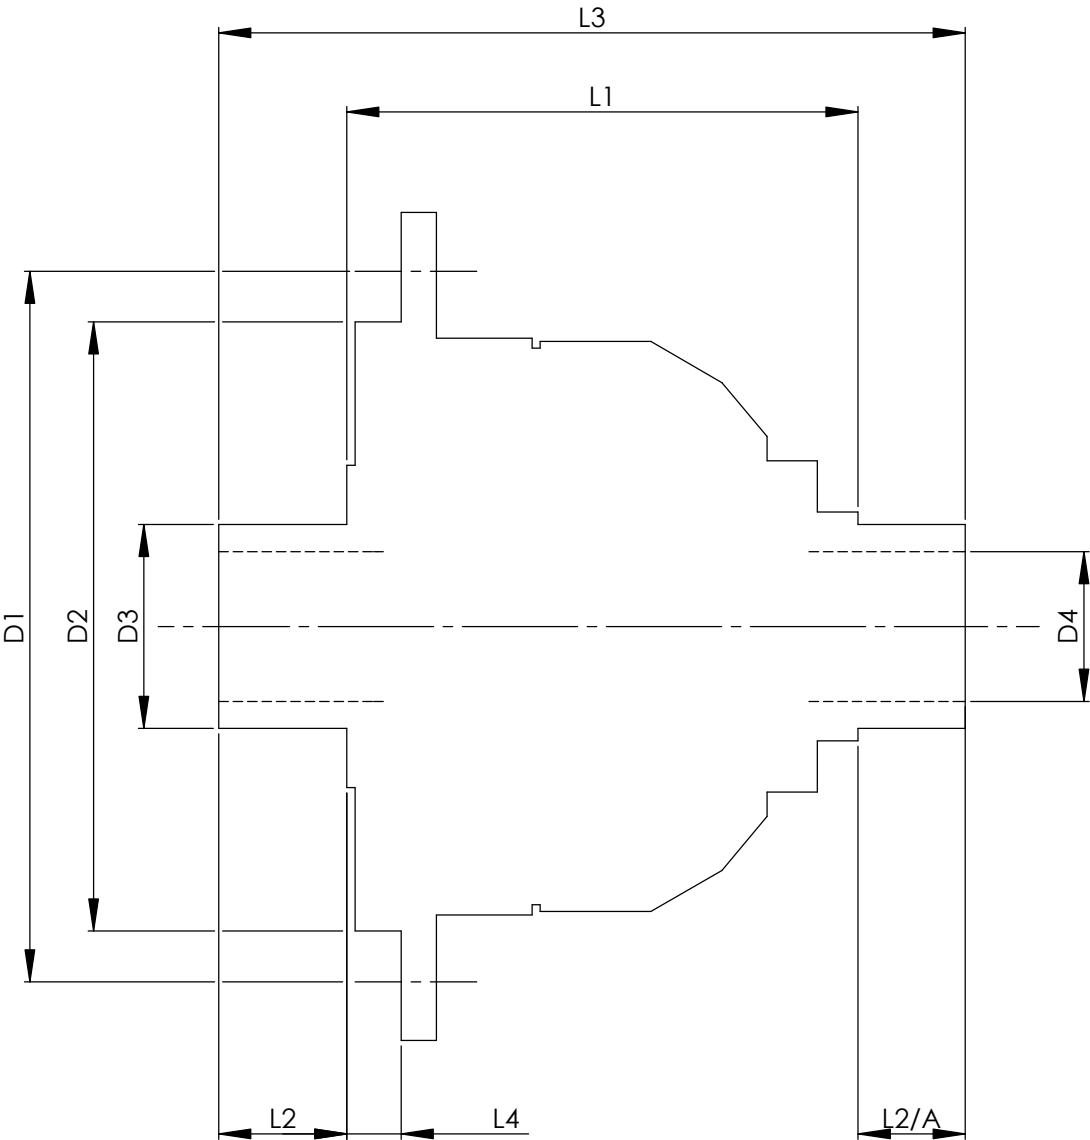

TITLE F.W.D. DIFF DATA SHEET.	
SCALE 1:1 U.O.S.	SHEET 1 OF 1
Drg. No. QDH13B	

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
R.T. QUARRE ENGINEERING LTD.
AND MAY NOT BE USED COPIED OR EXHIBITED
WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01	DATE. 19.5.05
DRAWN BY. M.L.M.	
Used In.	MITSUBISHI Lancer Evolution 8 (front)