


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.413	137.5
No. OF BOLTS		12	12
THREAD / THRO' HOLE		0.430	10.9
CROWN WHEEL SPIGOT DIA	D2	4.5865	116.5
BEARING DIA	D3	1.6292	41.4
BEARING DISTANCE	L1	4.441	112.8
SPIGOT LENGTH	L2	0.820	20.8
	L2/A	0.820	20.8
OVERALL LENGTH	L3	6.081	154.5
BEARING/CROWN WHEEL	L4	1.797	45.6
BORE	D4	1.1894	30.2
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		24/48 DP	
TYPE			
PRESSURE ANGLE		37.5 DEG	

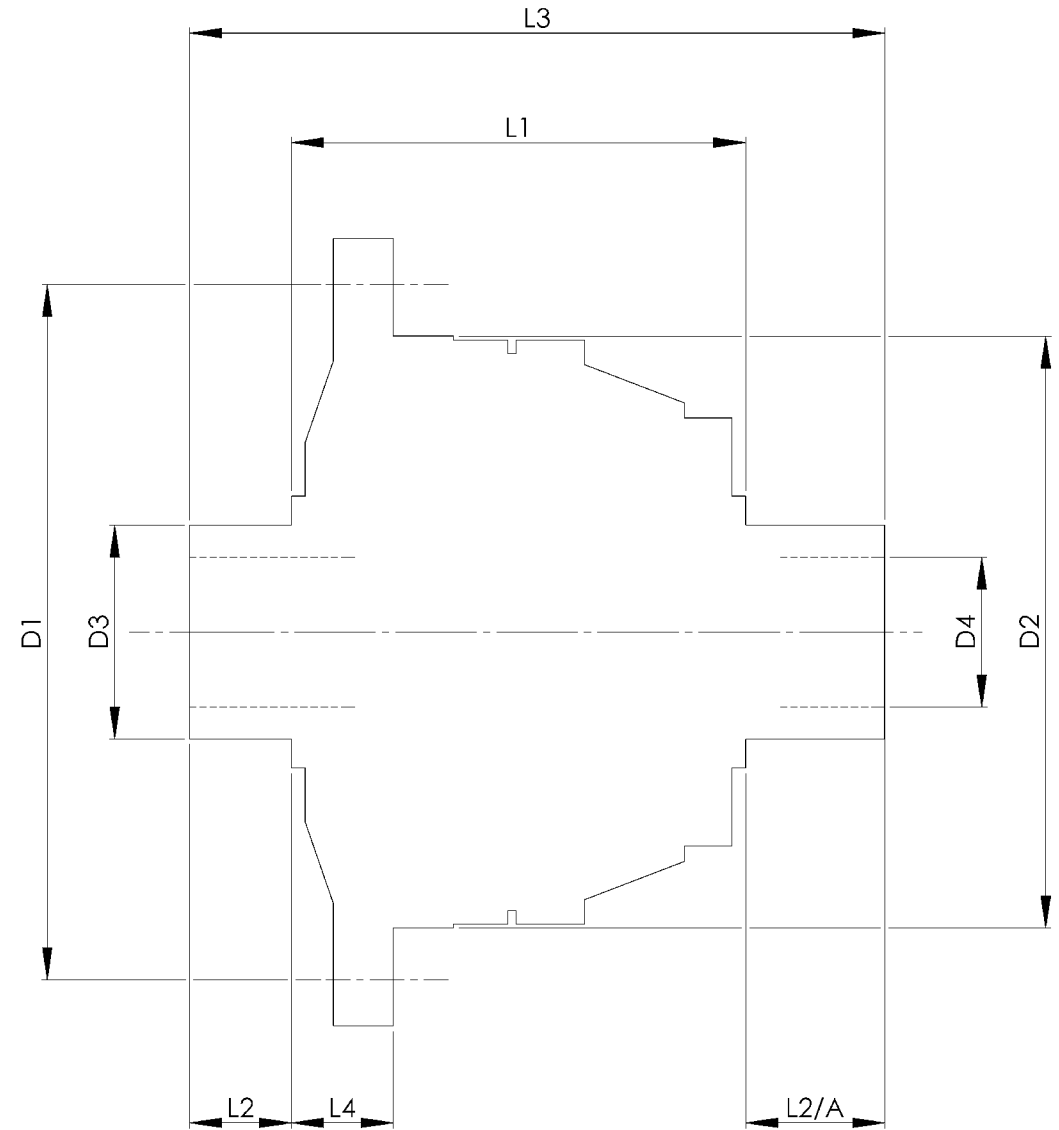

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDH1U

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF M.L.M. ENGINEERING. ANY UNAUTHORIZED REPRODUCTION OR USE WITHOUT THE WRITTEN PERMISSION OF M.L.M. ENGINEERING IS PROHIBITED.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 17.5.05	
DRAWN BY. M.L.M.	

Used In. DODGE NEON SRT-4