


Drg No. QDH5J

REMOVE ALL BURRS AND SHARP EDGES.

THIRD ANGLE PROJECTION.

		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.040	128
No. OF BOLTS		12	12
THREAD / THRO' HOLE		M10x1.25	M10x1.25
CROWN WHEEL SPIGOT DIA	D2	4.3306	110.0
BEARING DIA	D3	1.9698	50.0
BEARING DISTANCE	L1	3.565	90.6
SPIGOT LENGTH	L2	0.795	20.2
	L2/A	0.770	19.6
OVERALL LENGTH	L3	5.130	130.3
BEARING/CROWN WHEEL	L4	1.165	29.6
BORE	D4	1.074	27.3
DRIVE SHAFT SPLINE:-			
No. OF TEETH		34	
PITCH		32/64 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

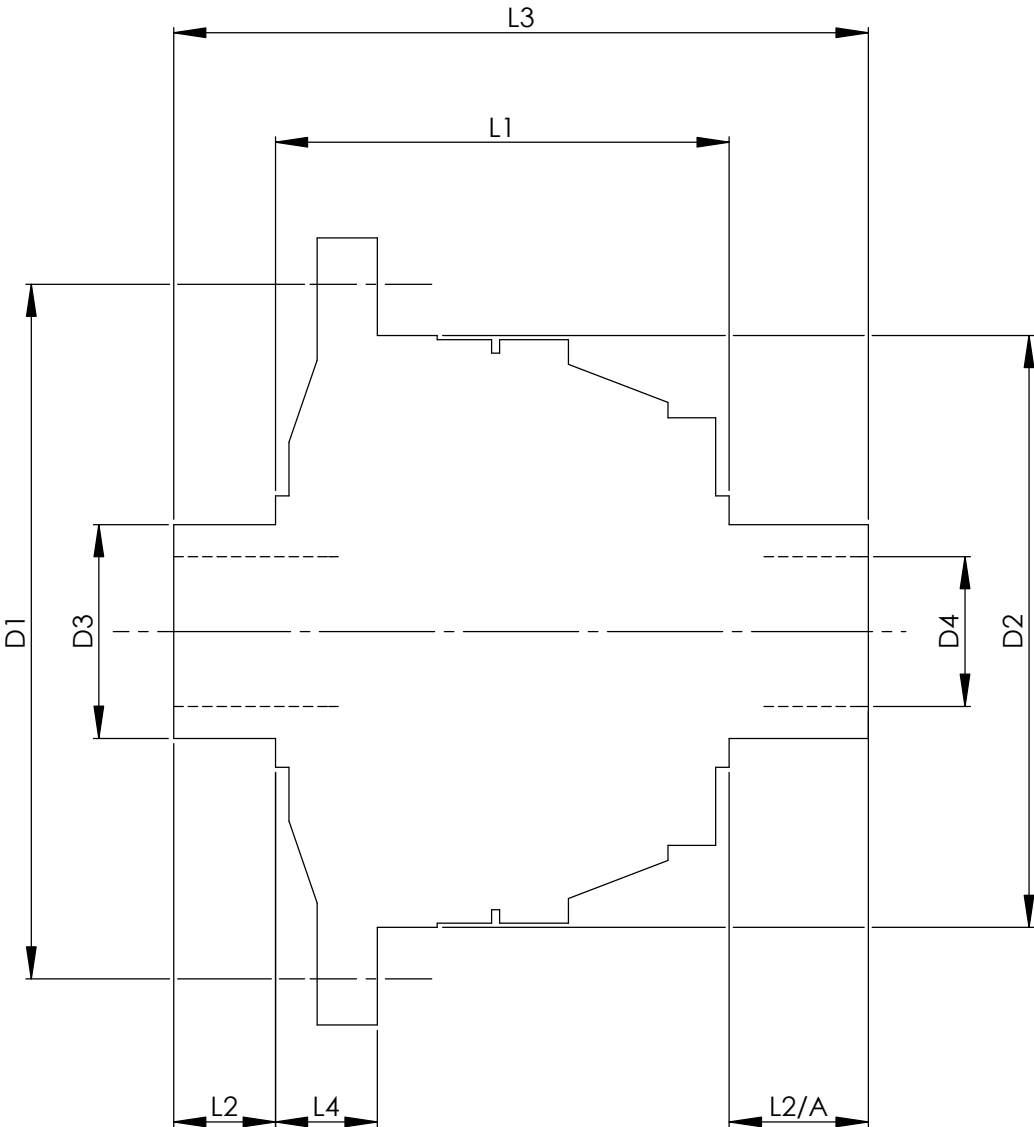

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDH5J

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
IS THE EXCLUSIVE PROPERTY OF
R.T. SQUARE ENGINEERING LTD.
AND MAY NOT BE USED COPIED OR EXHIBITED
WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01	DATE. 20.5.05
DRAWN BY. M.L.M.	
Used In.	SAAB NEW 900 95 - 98 MY 9 - 3 98MY Current

SOLID WORKS